

LK-156FR



Cutting Range			Weight (kg)	Length (mm)
Application	mm ²	MCM		
Copper	150	350	1.3	444
Aluminum Cable	150	350		
Communications Cable	DIA. 25mm			

LK-516FR



Cutting Range			Weight (kg)	Length (mm)
Application	mm ²	MCM		
Copper	240	500	2.5	648
Aluminum Cable	500	1000		
Communications Cable	DIA. 38mm			

LK-246FR



Cutting Range			Weight (kg)	Length (mm)
Application	mm ²	MCM		
Copper	150	350	1.37	533
Aluminum Cable	240	500		
Communications Cable	DIA. 30mm			

LK-526FR



Cutting Range			Weight (kg)	Length (mm)
Application	mm ²	MCM		
Copper	400	750	2.8	800
Aluminum Cable	500	1000		
Communications Cable	DIA. 38mm			

LK-326FR



Cutting Range			Weight (kg)	Length (mm)
Application	mm ²	MCM		
Copper	325	750	1.8	660
Aluminum Cable	325	750		
Communications Cable	DIA. 35mm			

LK-570FR



Cutting Range			Weight (kg)	Length (mm)
Application	mm ²	MCM		
Copper	500	1000	3.3	830
Aluminum Cable	600	1200		
Communications Cable	DIA. 44mm			

LK-300BV Copper & Aluminum Cable **Opening: 32mm**
With 1000V insulated Handles



Model No.	Cutting Range		Weight (kg)	Length (mm)
	mm ²	AWG		
LK-300BV	300	600MCM	0.6	240

LK-530BV Copper & Aluminum Cable **Opening: 52mm**
With 1000V insulated Handles



Model No.	Cutting Range		Weight (kg)	Length (mm)
	mm ²	AWG		
LK-530BV	400	750MCM	0.9	280

LK-327BV Copper & Aluminum Cable
Labor-Saving Type Opening: 32mm
With 1000V insulated Handles



Model No.	Cutting Range		Weight (kg)	Length (mm)
	mm ²	AWG		
LK-327BV	240	600MCM	0.7	250

Cable Stripper for PE/PR/PVC Cable
PG-3V With 1000V insulated Handles



Model No.	Stripping Range (mm)	Weight (kg)	Length (mm)
PG-3	Ø26-52	0.70	260

LK-60AV With 1000V insulated Handles



Model No.	Cutting Range		Weight (kg)	Length (mm)
	mm ²	AWG		
LK-60AV	60	#2/0	0.5	235

Ratchet Cable Cutter

LK-325AV Copper & Aluminum Cable
Opening: 32mm
With 1000V insulated Handles



Model No.	Cutting Range		Weight (kg)	Length (mm)
	mm ²	AWG		
LK-325AV	240	600MCM	0.7	250


LK-520AV Copper & Aluminum Cable
Opening: 52mm
With 1000V insulated Handles



Model No.	Cutting Range		Weight (kg)	Length (mm)
	mm ²	AWG		
LK-520AV	400	750MCM	0.9	270

HAND CABLE CUTTER

Two cutting actions - Fast scissor Cutting for small cable, converts automatically to ratchet mode

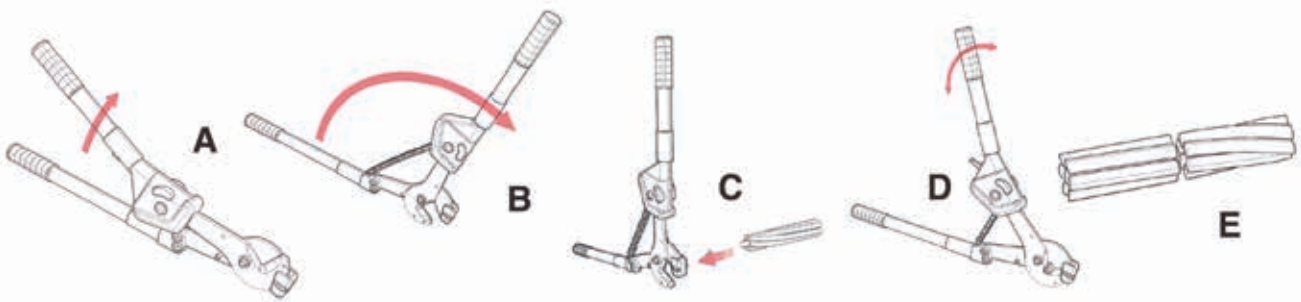

AC-300 *With Fiberglass Handle*



Cutting Range			Weight (kg)	Length (mm)
Application	mm ²	mm		
ACSR	400	25	5	800
Soft Steel Rod	1/2 inch	12.7		

LK-400A *With Fiberglass Handle*



Cutting Range			Weight (kg)	Length (mm)
Application	mm ²	mm		
Copper	630	52	5	750
Aluminum Cable	630	52		

SC-16B *With Bearing*

For wire rope only. Do cut CU/AL wire or ACSR.



Cutting Range		Weight (kg)	Length (mm)
Application	Max. Dia. (mm)		
Wire Rope	16	1.14	230

SC-30A

With Bearing


For ACSR only. Do cut CU/AL wire or wire rope.



Cutting Range		Weight (kg)	Length (mm)
Application	Max. Dia. (mm)		
ACSR	30	0.6	240

LK-1300 Copper & Aluminum Cable

Opening: 120mm

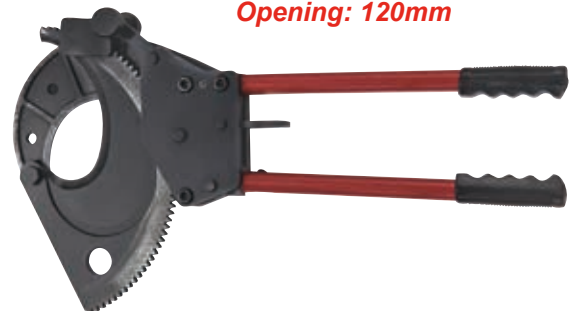

Model No.	Cutting Range		Weight (kg)	Length (mm)
	mm ²	AWG		
LK-1300	1000	2000MCM	8.5	630

Cutting blades are made of heavy duty forged steel

LK-60A Copper & Aluminum Cable



Model No.	Cutting Range		Weight (kg)	Length (mm)
	mm ²	AWG		
LK-60A	60	#2/0	0.5	235

LK-38A Copper & Aluminum Cable



Model No.	Cutting Range		Weight (kg)	Length (mm)
	mm ²	AWG		
LK-38A	38	#1	0.3	210

LK-38B Copper & Aluminum Cable




Model No.	Cutting Range		Weight (kg)	Length (mm)
	mm ²	AWG		
LK-38B	38	#1	0.3	210

LK-22A Copper & Aluminum Cable



Model No.	Cutting Range		Weight (kg)	Length (mm)
	mm ²	AWG		
LK-22A	22	#4	0.2	160

LK-22B Copper & Aluminum Cable

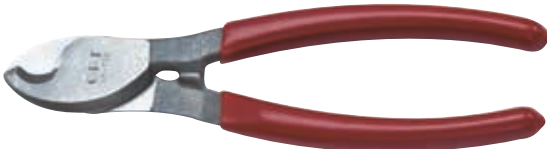

Model No.	Cutting Range		Weight (kg)	Length (mm)
	mm ²	AWG		
LK-22B	22	#4	0.2	160

LK-500 Copper & Aluminum Cable



Model No.	Cutting Range		Weight (kg)	Length (mm)
	mm ²	MCM		
LK-500	500	1000	3	770

LK-250 Copper & Aluminum Cable




Model No.	Cutting Range		Weight (kg)	Length (mm)
	mm ²	MCM		
LK-250	250	500	1.2	530

LK-125 Copper & Aluminum Cable



Model No.	Cutting Range		Weight (kg)	Length (mm)
	mm ²	MCM		
LK-125	125	250	0.7	300

AC-100 Rope & Wire Cutter

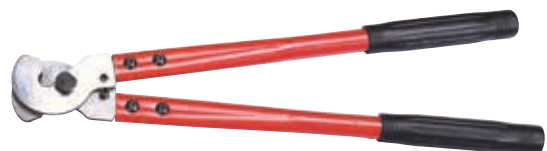

Cutting Range		Weight (kg)	Length (mm)
Application	Range		
Cable	60mm ²	0.7	360
Steel Bar	DIA. 5mm		
Wire Rope	DIA. 6mm		

Cutting blades are made of carbon steel

LY-206 Rope & Wire Cutter



Model No.	Cutting Range	Weight (kg)	Length (mm)
	inch		
LY-206	DIA. 3/8	0.12	167

HAND CABLE CUTTER

LIGHT TYPE
WITH ALUMINUM ALLOY HANDLE

LK-95 & LK-150 Copper & Aluminum Cable



Model No.	Cutting Range		Weight (kg)	Length (mm)
	mm ²	AWG		
LK-95	95	3/0	0.73	310
LK-150	150	300MCM	1.22	460

AC-110 Rod & Wire



Cutting Range		Weight (kg)	Length (mm)
Application	Range		
Cable	60mm ²	0.73	310
Steel Bar	DIA. 5mm		
Wire Rope	DIA. 7mm		

LK-325 Copper & Aluminum Cable



Model No.	Cutting Range		Weight (kg)	Length (mm)
	mm ²	AWG		
LK-325	325	600MCM	2.1	600

AC-190 Rod & Wire



Cutting Range		Weight (kg)	Length (mm)
Application	Range		
Cable	100mm ²	1.1	445
Steel Bar	DIA. 7mm		
Wire Rope	DIA. 10mm		

LK-550 Copper & Aluminum Cable



Model No.	Cutting Range		Weight (kg)	Length (mm)
	mm ²	AWG		
LK-550	500	1000MCM	3.14	800

AC-200 Rod & Wire




Cutting Range		Weight (kg)	Length (mm)
Application	Range		
Cable	150mm ²	2.1	600
Steel Bar	DIA. 9mm		
Wire Rope	DIA. 14mm		

LK-220 Copper & Aluminum Cable



Model No.	Cutting Range		Weight (kg)	Length (mm)
	mm ²	AWG		
LK-220	200	400MCM	0.98	500

AC-210 ACSR & Rod & Wire

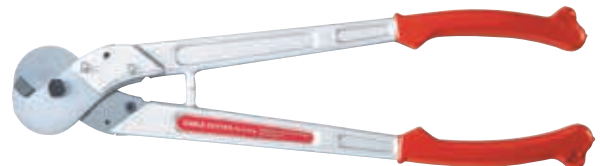

Cutting Range		Weight (kg)	Length (mm)
Application	Range		
Spring Wire	DIA. 4.5mm	2.1	600
Cable	150mm ²		
Steel Bar	DIA. 9mm		
ACSR	DIA. 15mm		

LK-400 Copper & Aluminum Cable



Model No.	Cutting Range		Weight (kg)	Length (mm)
	mm ²	AWG		
LK-400	400	750MCM	1.6	700

HAND CABLE CUTTER


Ratchet Cable Cutter

LK-325A Copper & Aluminum Cable **Opening: 32mm**



Model No.	Cutting Range		Weight (kg)	Length (mm)
	mm ²	AWG		
LK-325A	240	600MCM	0.7	250

LK-300B Copper & Aluminum Cable **Opening: 32mm**

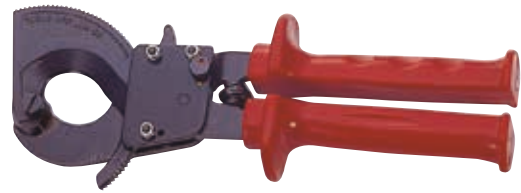

Model No.	Cutting Range		Weight (kg)	Length (mm)
	mm ²	AWG		
LK-300B	300	600MCM	0.6	240

LK-520A Copper & Aluminum Cable **Opening: 52mm**



Model No.	Cutting Range		Weight (kg)	Length (mm)
	mm ²	AWG		
LK-520A	400	750MCM	0.9	270

LK-530B Copper & Aluminum Cable **Opening: 52mm**



Model No.	Cutting Range		Weight (kg)	Length (mm)
	mm ²	AWG		
LK-530B	400	750MCM	0.9	280

LK-450A Copper & Aluminum Cable **With Bearing**
Opening: 42mm



Model No.	Cutting Range		Weight (kg)	Length (mm)
	mm ²	AWG		
LK-450A	400	750MCM	0.96	240

LK-327B Copper & Aluminum Cable
Labor-Saving Type **Opening: 32mm**



Model No.	Cutting Range		Weight (kg)	Length (mm)
	mm ²	AWG		
LK-327B	240	600MCM	0.7	250

LK-320A Copper & Aluminum Cable **With Bearing**
Opening: 32mm



Model No.	Cutting Range		Weight (kg)	Length (mm)
	mm ²	AWG		
LK-320A	325	600MCM	0.94	220

LK-1000A Copper & Aluminum Cable
Telephone Cable



Cutting Range			Weight (kg)	Length (mm)
Application	mm ²	AWG		
Copper & Aluminum Cable	1000	2000MCM	3.5	550
Telephone Cable	DIA. 65mm			

HAND CABLE CUTTER

Ratchet Cable Cutter

LK-260A Copper & Aluminum Cable

Opening: 25mm



Model No.	Cutting Range		Weight (kg)	Length (mm)
	mm ²	AWG		
LK-260A	240	550MCM	1.3	310


SC-16A Steel Wire Rope



Model No.	Cutting Range	Weight (kg)	Length (mm)
	mm		
SC-16A	DIA. 16	1	290

LK-760A Copper & Aluminum Cable

Opening: 55mm

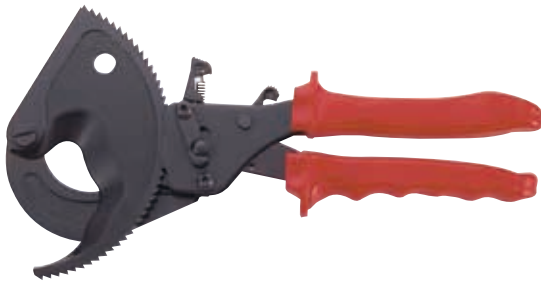

Model No.	Cutting Range		Weight (kg)	Length (mm)
	mm ²	AWG		
LK-760A	500	1000MCM	0.9	290

SC-16L Steel Wire Rope



Model No.	Cutting Range	Weight (kg)	Length (mm)
	mm		
SC-16L	DIA. 16	1.3	430

LK-760L Copper & Aluminum Cable

Opening: 55mm



Model No.	Cutting Range		Weight (kg)	Length (mm)
	mm ²	AWG		
LK-760L	500	1000MCM	0.9	430

SC-32A Opening: 32mm



Cutting Range		Weight (kg)	Length (mm)
Application	Range(mm)		
Copper & Aluminum Rod	DIA. 25	1.6	420
ACSR	DIA. 20		
Soft Steel Bar/Rod (Below SS41)	DIA. 10		

LK-1050L Copper & Aluminum Cable

Opening: 105mm



Model No.	Cutting Range		Weight (kg)	Length (mm)
	mm ²	AWG		
LK-1050L	1000	2000MCM	3.8	680

Wire Rope & Spring Wire Cutter

AC-7



Model No.	Cutting Range		Weight (kg)	Length (mm)
	Wire Rope	Spring Wire		
AC-7	Ø 1/8"	Ø 1/16"	0.2	165

AC-8



Model No.	Cutting Range		Weight (kg)	Length (mm)
	Wire Rope	Spring Wire		
AC-8	Ø 3/16"	Ø 1/16"	0.3	180

LK-206C Ribbon Cable Cutter



Model No.	Cutting Range (mm)	Weight (kg)	Length (mm)
LK-206C	Max. 30 Width	0.2	168

LK-206E Coaxial Cable Cutter




Model No.	Cutting Range		Weight (kg)	Length (mm)
	Application	mm ²		
LK-206E	RG58 / RG59 / RG6 With steel center conductor	16	0.15	160

LK-22G



Model No.	Cutting Range (mm)	Weight (kg)	Length (mm)
LK-22G	Cable RG58/RG59/RG6/RG7/RG11 With steel center conductor	0.2	160

LY-205 6.8" Cord Push Tool



Model No.	Pushing Range of Cord	Weight (kg)	Length (mm)
LY-205	Ø 3/8"-3/4"	0.2	155

Mini-Purpose Shear KN-228

Made of Stainless Steel



Model No.	Cutting Application	Weight (kg)	Length (mm)
KN-228	Fiberglass & Aramid Fabrics	0.1	125

LY-925

Made of Stainless Steel HRC50-54



Cutting Length:42mm

Model No.	Cutting Application & Range	Weight (kg)	Length (mm)
LY-925	Soft Metal Wire Max. Ø2.5mm	0.2	190

LY-936

Light Duty Type

Made of Stainless Steel HRC50-54



Model No.	Cutting Application & Range	Weight (kg)	Length (mm)
LY-936	Soft Metal Wire Max. Ø2.5mm	0.2	165

LY-946

Soft Cable

Made of High Carbon Stainless Steel HRC58-60



Cutting Length:42mm

Model No.	Cutting Application & Range	Weight (kg)	Length (mm)
LY-946	Soft Cable 22mm ²	0.19	138

LY-151

With serrated blade

For kevlar or fiber optic cable



LY-151C

Made of Highcarbon Alloy Steel

Model No.	Cutting Application	Weight (kg)	Length (mm)
LY-151	Fiber Optic	0.14	160
LY-151C	Fiber Optic	0.15	147